


SECURE ACCESS




SRR Series Reservoir & Roof Hatch

with weatherseal gasket to seal out weather, sand and debris.

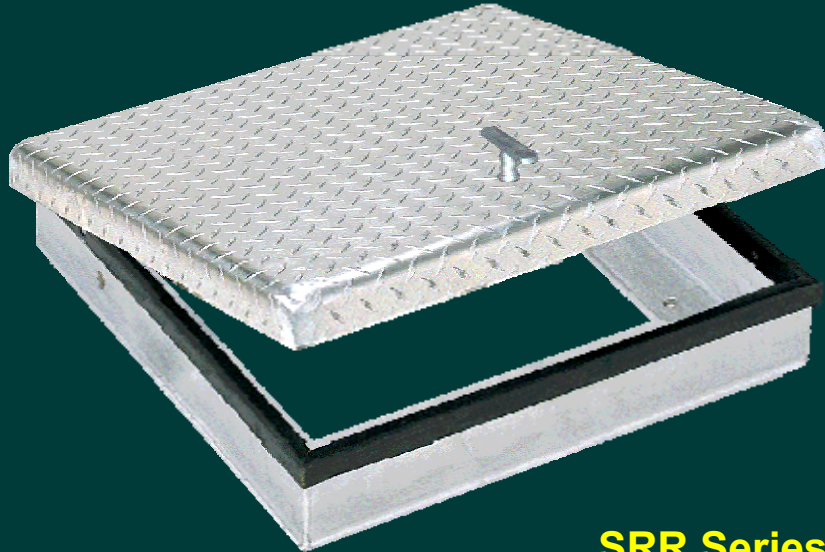

In commercial buildings and town homes and the utilities that service them, the SRR Series access hatch provides secure, convenient access onto roofs and into reservoirs.

Shown with optional exterior mounting flange, padlock staple, and lifting handle

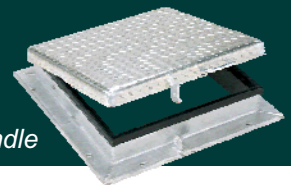

Manufacturing a complete line of engineered metal products for the construction industry, we set the standard for quality, service and innovation. For product specifications and details, visit:


www.usffab.com

U.S.F. Fabrication, Inc., Hialeah, Florida USA 1-800-258-6873 Fax: 305-882-1577 service@usffab.com
Outside USA & Canada, 1-305-364-8221 Fax: 1-305-512-7721 export@usffab.com




Manufacturing in the USA since 1916


SRR SECURITY RESERVOIR & ROOF HATCH

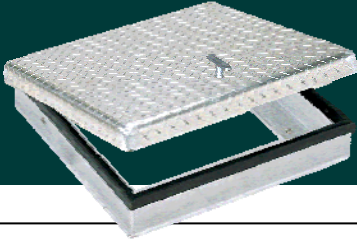

Model SRR-I
with Interior
Mounting Flange

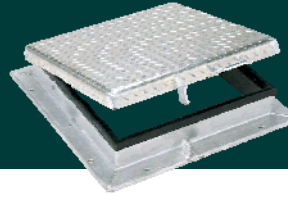

Model SRR-E
with optional Exterior Mounting Flange,
Padlock Staple and Lifting Handle

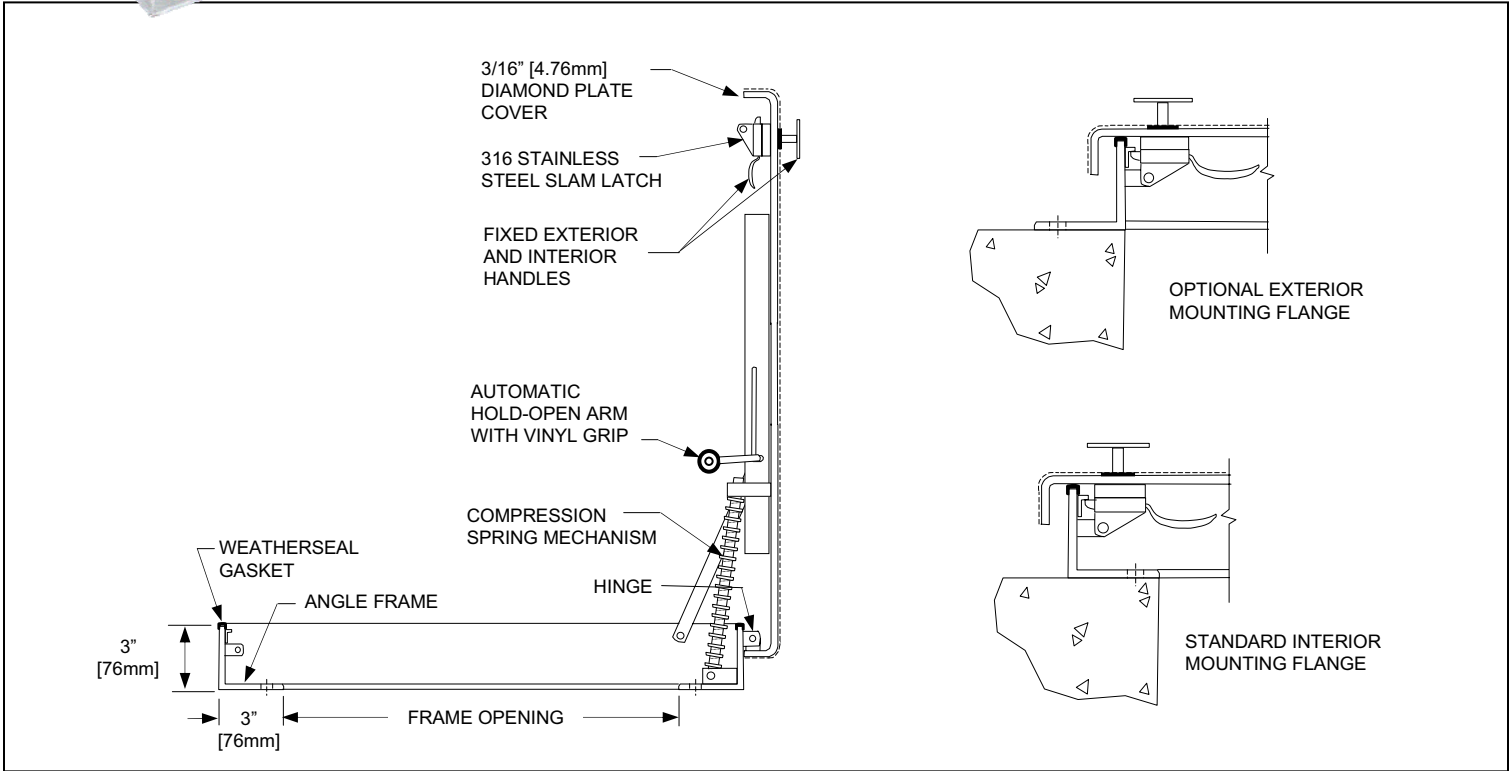

SPECIFICATIONS

The security reservoir / roof hatch shall be model SRR as manufactured by U.S.F. Fabrication, Inc., Hialeah, Florida USA with the size being specified on the plans.

Cover: Cover shall be 3/16" [4.76mm] aluminum [specify diamond or smooth] plate reinforced for 150 lb/ft² [732 kg/m²] pedestrian loading. Cover shall have a 316 stainless steel hold open arm with red vinyl grip to automatically lock the cover in either the 70 or 90 degree position.

Frame: Frame shall be 3/16" [4.76mm] aluminum structural angle with holes for securing to curb or roof deck [specify internal or external mounting flange] and weatherseal gasket.

Hinges: Hinges shall be 316 stainless steel.

Spring(s): Springs shall be stainless steel compression springs contained within the frame.




Latch: 316 stainless steel slam latch with interior and exterior handles, and interior padlock lugs.

Material / Finish: Mill finish aluminum cover and frame with 316 stainless steel hardware.

Installation: Installation shall be in accordance with the manufacturer's instructions.

Warranty: Door shall be manufactured in the United States. Manufacturer shall guarantee the unit against defects in materials and workmanship for a period of ten [10] years.

SECURITY OPTIONS

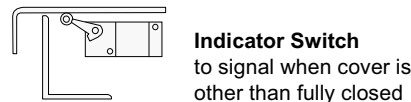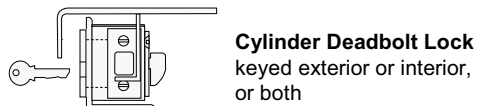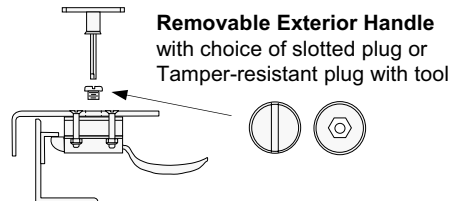

OTHER OPTIONS

- Exterior mounting flange
- Smooth plate cover
- Enclosed compression springs
- Electrostatic powder coated finish
- Insulation under cover
- All stainless steel construction

STANDARD SIZES

custom sizes are available

FRAME OPENING Width x Hinge Side In [mm]
24 x 24 [610 x 610]
30 x 30 [762 x 762]
36 x 30 [914 x 762]
36 x 36 [914 x 914]
42 x 42 [1067 x 1067]
30 x 54 [762 x 1372]
48 x 48 [1219 x 1219]

