

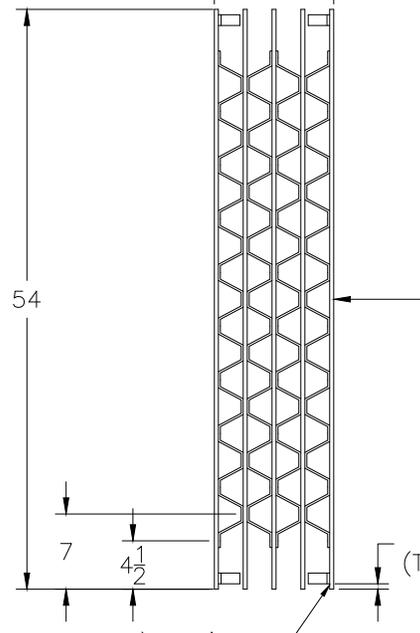
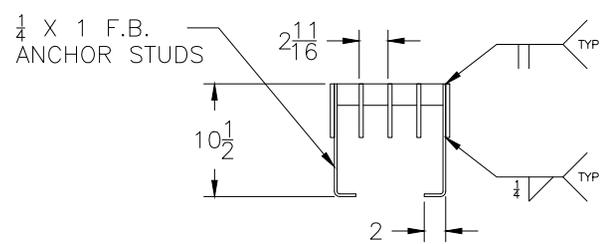


(11 1/2 OVER RIVETS)
 11 1/8 +1/16
-1/8

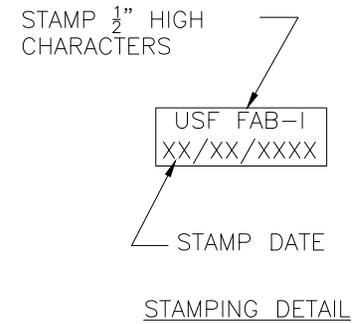

STAMP WITH 1/2" HIGH LETTERS ON END B.B. TO READ: "USF FAB-1" WITH DATE STAMPED. (SEE STAMPING DETAIL)

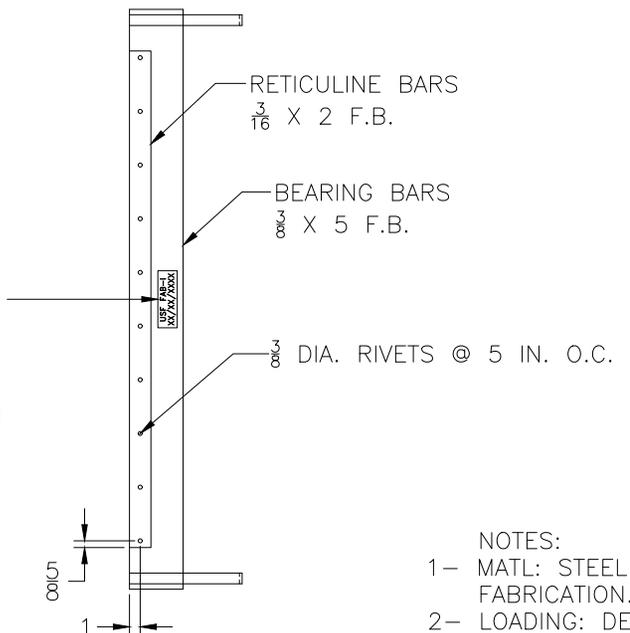

- NOTES:
- 1- MATL: STEEL, HOT DIP GALVANIZED AFTER FABRICATION.
 - 2- LOADING: DESIGNED FOR OFF STREET LOCATIONS WHICH MAY OCCASIONALLY RECEIVE H-20 WHEEL LOADS.
 - 3- APPROX. GRATE WEIGHT: 185 LBS. ±5%
 - 4- ALL JOINTS FULL DEPTH 1/4" FILLET WELDS WITH SEAL WELDS TOP AND BOTTOM UNLESS NOTED OTHERWISE.

CURB EXPOSURE GRATE
 LOUISIANA TYPE-I

REV.	DATE	BY	APP'D	DESCRIPTION
4	07/22/20	ALJ	ALJ	UPDATED WELDS PER NCR 4539
3	5/4/20	LE	LE	UPDATED WELDING TO MATCH N.Y. D.O.T. STANDARDS PER NCR 4472
2	10/9/18	M.G.	JDM	UPDATED TITLE BLOCK
1	02/3/16	C.S.	C.S.	ADJUSTED TOLERANCES, UPDATED TITLE BLOCK

THIS DOCUMENT IS THE PROPERTY OF U.S.F. FABRICATION, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF U.S.F. FABRICATION, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M
BREAK ALL SHARP CORNERS & EDGES TO 0.01
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL
INCHES = ± 1/16
1/16 = ± 1/32
1/32 = ± 1/64

COPYRIGHT © 2020
 ALL RIGHTS RESERVED



U.S.F. FABRICATION INC.
 HIALEAH, FLORIDA

**GRATE RVT 6688 H20 GLV
 LADOTD TYPE I**

OWN. BY: EW/ALJ	SCALE: 1=12	SHEET: 1 of 1	DATE: 7/31/15
CHK. BY: ECS/ALJ	DWG.# 100001378	SHEET SIZE: B	REV: 4