


- NOTE:**
- 1-MATERIAL: STEEL, PAINTED TO F.D.O.T. SPECIFICATIONS
 - 2-LOADING: NON-TRAFFIC.
 - 3-FLOW CAPACITY: 1500 SQ.IN. (9680 cm²)
 - 4-WEIGHT: 190 LBS. (85 kg.)
 - 5-ALL DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS (mm) SHOWN IN PARENTHESIS.

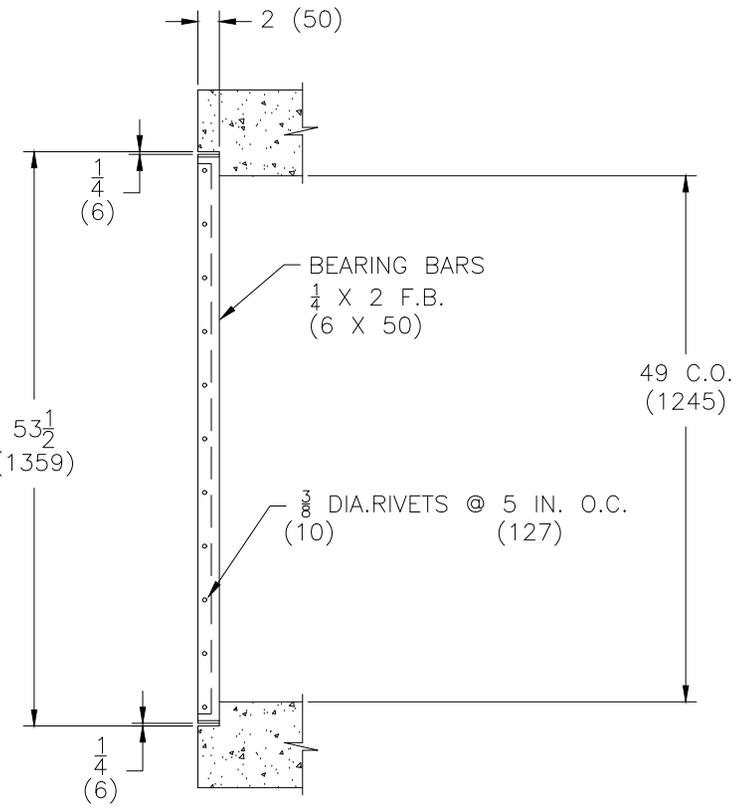

REV.	DATE	BY	APP'D	DESCRIPTION
2	08/7/19	C.S.	C.S.	INDEX 425-052 WAS INDEX 232
1	02/2/16	C.S.	C.S.	ADJUSTED TOLERANCES, UPDATED TITLE BLOCK

THIS DOCUMENT IS THE PROPERTY OF U.S.F. FABRICATION, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF U.S.F. FABRICATION, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M
BREAK ALL SHARP CORNERS & EDGES TO 0.01
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL
INCHES = ± 1/16
1/16 = ± 1/32
1/32 = ± 1/64

COPYRIGHT © 2016 ALL RIGHTS RESERVED

FLA. D.O.T. INDEX 425-052
TYPE "D" DITCH BOTTOM INLET

 **U.S.F. FABRICATION INC.**
HIALEAH, FLORIDA

GRATE RVT 6607 PED PTD

DWN. BY: ALJ	SCALE: 1"=12"	SHEET: 1 of 1	DATE: 7/23/15
CHK. BY: ALJ	DWG.# 1000001459	SHEET SIZE: B	REV: 2