


- NOTE:
- 1-MATERIAL: STEEL, PAINTED TO FLA. DOT. SPECIFICATIONS.
 - 2-LOADING: NON-TRAFFIC.
 - 3-FLOW CAPACITY: 790 SQ.IN. (5095 cm²)
 - 4-WEIGHT: 105 LBS. (48kg.)
 - 5-ALL DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS (mm) SHOWN IN PARENTHESIS.

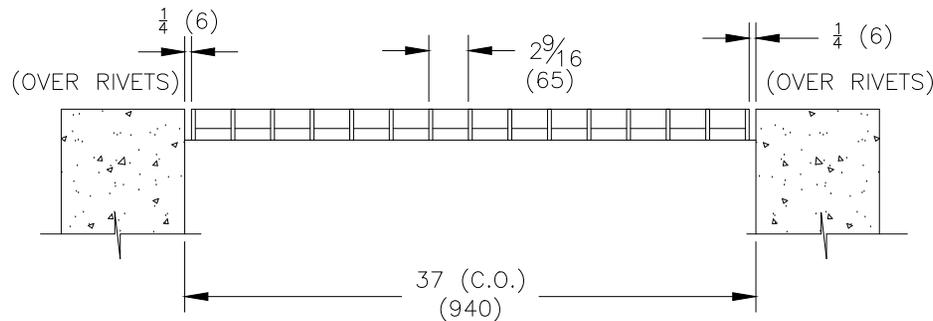

REV.	DATE	BY	APP'D	DESCRIPTION
2	08/7/19	C.S.	C.S.	INDEX 425-052 WAS INDEX 232
1	02/2/16	C.S.	C.S.	ADJUSTED TOLERANCES, UPDATED TITLE BLOCK

THIS DOCUMENT IS THE PROPERTY OF U.S.F. FABRICATION, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF U.S.F. FABRICATION, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M

BREAK ALL SHARP CORNERS & EDGES TO 0.01

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL

INCHES = $\pm 1/16$
 $1/16 = \pm 1/32$
 $1/32 = \pm 1/64$

COPYRIGHT © 2016
ALL RIGHTS RESERVED

FLA. D.O.T. INDEX 425-052
TYPE "C" DITCH BOTTOM INLET



U.S.F. FABRICATION INC.
HIALEAH, FLORIDA

GRATE RVT 6606 PED PTD

OWN. BY: ALJ	SCALE: 1/8"=1"	SHEET: 1 of 1	DATE: 7/23/15
CHK. BY: ALJ	DWG.# 1000001461	SHEET SIZE: B	REV: 2