


40 ANCHOR DET.
(7)-REQ.D.

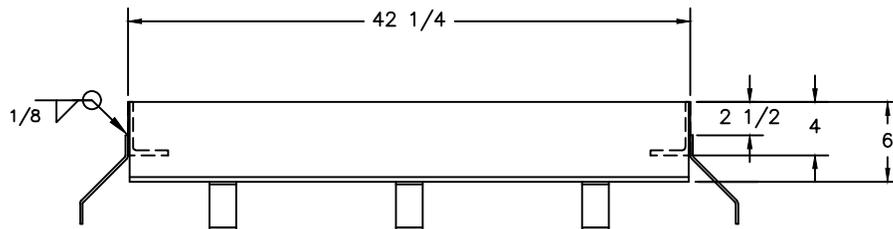

NOTES:

- 1-MATERIAL: ASTM A-36 STEEL
- 2-FINISH: PAINTED TO FLA. D.O.T. SPECS.
OR HOT DIP GALV. AFTER FAB.
- 3-ALL DIMENSIONS ARE IN INCHES
- 4-APPROX. WEIGHT : 76 LBS.

THIS DOCUMENT IS THE PROPERTY OF U.S.F. FABRICATION, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF U.S.F. FABRICATION, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M

BREAK ALL SHARP CORNERS & EDGES TO 0.01

TOLERANCES UNLESS OTHERWISE SPECIFIED:

INCHES = ± 1/16
1/16 = ± 1/32
1/32 = ± 1/64

COPYRIGHT © 2017
ALL RIGHTS RESERVED



U.S.F. FABRICATION INC.
HIALEAH, FLORIDA

USF 6640 FRAME - STEEL

DRAWN BY: A.Q.	SCALE: 1:10	SHEET: 1 of 1	DATE: 01/05/17
APP'D BY: A.Q.	DWG. NO: 1000053870	SHEET SIZE: B	REV: 0