


1/4 ϕ HOLE TO FACILITATE GALVANIZING PROCESS

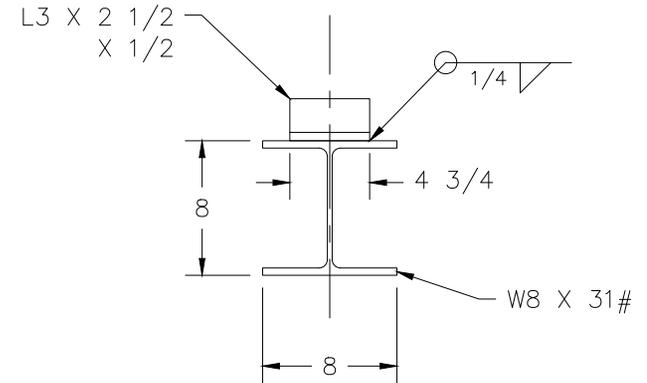

NOTES:

- 1- MATERIAL: STEEL A36, HOT DIP GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ASTM A-123
- 2- APPROXIMATE WEIGHT: 151 LBS.
- 3- LOADING: H-25 WHEEL LOADS

THIS DOCUMENT IS THE PROPERTY OF U.S.F. FABRICATION, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF U.S.F. FABRICATION, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M

BREAK ALL SHARP CORNERS & EDGES TO 0.01

TOLERANCES UNLESS OTHERWISE SPECIFIED:

INCHES = $\pm 1/16$
 $1/16 = \pm 1/32$
 $1/32 = \pm 1/64$

COPYRIGHT © 2019
 ALL RIGHTS RESERVED

STANDARD No. MD-374.03 – INLET TYPE WR			
MARYLAND DEPARTMENT OF TRANSPORTATION			
 U.S.F. FABRICATION INC. HIALEAH, FLORIDA			
SUPPORT BEAM STEEL GALVANIZED			
DRAWN BY: DAV	SCALE: 1=8	SHEET: 1 OF 1	DATE: 11/2/18
APP'D BY: DAV	DWG. NO: 1000086351	SHEET SIZE: B	REV: 0